



Your Solutions Partner

# Installation Instructions

## Hera Pin Style Light Fixture



Tool Required - Not Included  
Phillips Screwdriver



**CAUTION:** Please read this manual completely before attempting to install, operate or service this equipment

*This manual is Copyright © 2018 Duke Manufacturing Co. All rights reserved.  
Reproduction without written permission is prohibited. Duke is a registered  
trademark of the Duke Manufacturing Co.*

### Duke Manufacturing Co.

2305 N. Broadway  
St. Louis, MO 63102  
Phone: 314-231-1130  
Toll Free: 1-800-735-3853  
Fax: 314-231-5074

[www.dukemfg.com](http://www.dukemfg.com)

P/N 229182  
REV B 5/04/2018

# LIGHT INSTALLATION INSTRUCTIONS

## **!WARNING**

- Turn the unit off, disconnect the power source and allow unit to come to room temperature before performing any service or maintenance on the following units.
- Remove food product from area under lights to avoid possible food contamination.
- Close Day Covers, if applicable.


**NOTE:** Failure to observe may result in damage to the equipment and/or severe bodily injury or death.

### STEP 1

Unplug the power for the unit you are working on. This will disconnect the power to the lights.



HOT FOOD UNIT

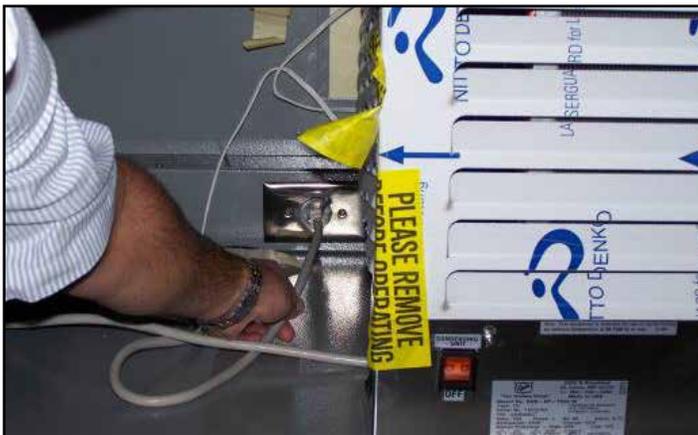

COLD PAN UNIT

**NOTICE:** The old style adapter with the spade connections are no longer available. If you have the old style lights they will need to be replaced so the new connectors will work.



### PURSE RAIL

#### Step 2 - Removal of old light

Using a Phillips screwdriver remove the screws and angle brackets holding the lights in place.

#### **NOTE:**

Start at the outside end and unscrew the first light fixture. Continue until light or lights needing replaced are removed.



# LIGHT INSTALLATION INSTRUCTIONS - continued

## Step 3 - Separating the lights

Remove the connector holding the lights together.



## Step 4 - Reconnect the new lights

Using the connectors reconnect the new lights.

**NOTE:** One (1) connector comes with kit.



## Step 5 - Power cord connector

If the light being replaced has a power cord connected to it, the connector must be replaced (included in kit)



## Step 6 - Re-Install Lights

Re-install light in reverse order of removing them.

## DAY COVER LIGHTS

### Step 2 - Removal power cord

Unhook the power cord from the end of the light fixture.



### Step 3 - Removal of old light

Remove the light fixture by grasping both ends and tilt the fixture down in clips and pull out of two metal or plastic spring clips.



### Step 4 - Separating the lights

Remove the connector holding the lights together.



## LIGHT INSTALLATION INSTRUCTIONS - continued

### Step 5 - Reconnect the new lights


Using the connectors reconnect the new lights.

**NOTE:** One (1) connector comes with kit.



### Step 6 - Power cord connector

If the light being replaced has a power cord connected to it, the connector must be replaced (included in kit)

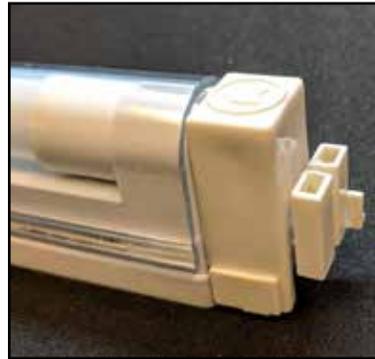

### Step 7 - Re-Install Lights

Re-install light in reverse order of removing them.



Your Solutions Partner

## Duke Manufacturing Co.

2305 N. Broadway

St. Louis, MO 63102

Phone: 314-231-1130

Toll Free: 1-800-735-3853

Fax: 314-231-5074

[www.dukemfg.com](http://www.dukemfg.com)