

Quick Start Guide Model TSC3-6/18 Proofer Oven

Oven/Proofer Start-Up

Turn ON the TSC3 6/18 Main Power
(left side switch)



to turn on the
Oven



to turn on the
Proofer



Boot Screen



Automatically Transitions to
Main Screen

Oven and Proofer lights will turn on and start preheating.



Oven, Proofer and Recipe
Buttons will turn to BLUE
background.

Touch Screen Definitions

Main Tool Bar

Screen Sleep Button* Info Button

Oven Recipe Information Bar

Recipe Temp Recipe Time
Recipe Name

Power Button or Back

Page Back


Page Forward

Proofer Recipe Information Bar

Recipe Humidity Recipe Temp Recipe Time


* Screen Sleep Button only available when Oven and Proofer are off

Door Open

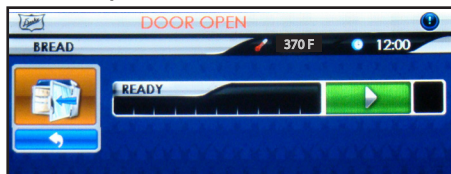

With oven door open, DOOR OPEN will flash in the Main Tool Bar and oven icon background is orange.

Touch to start Dry-Out cycle at end of use for each day.

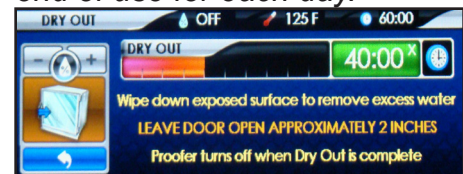

Follow instructions on screen.



Your Solutions Partner

Duke Manufacturing Company

2305 N. Broadway • St. Louis, MO 63102
1-800-735-3853 • 314-231-1130 • 314-231-5074
www.dukemfg.com


120084
Rev C 08/11/2022


Quick Start Guide Model TSC3-6/18 Proofer Oven


Oven Operating Instructions

Oven Recipe Selected:


Oven Recipe Preheat Screen
(if under temperature setpoint)

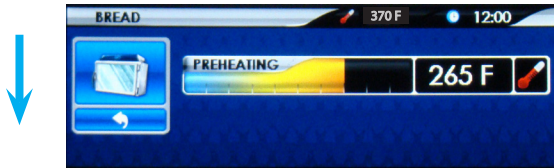


Oven Recipe Ready to Start Timer
(Load and Touch  button to start)

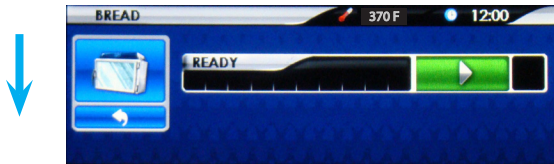


Oven Count Down Timer
(with Progress Bar)

- To cancel, press and hold the countdown timer  for 2 to 3 seconds.

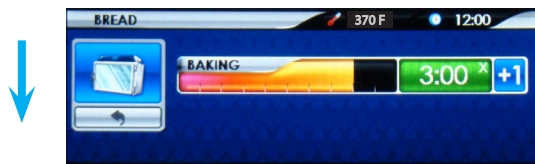


Oven Bake Complete Alarm
(with add 1 minute button )

- Touch the Timer  or Open Oven Door to cancel the alarm.

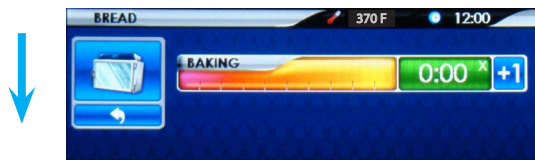


Back to Ready

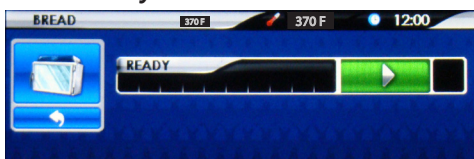


Proofer Operating Instructions

Proofer Recipe Selected:

Proofer Starting Up Screen
(if under temperature setpoint)

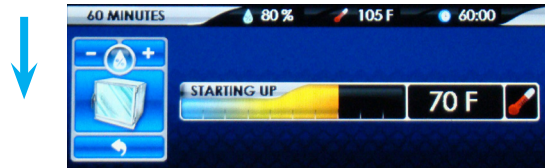


10 min. Starting Up Timer after reaching setpoint

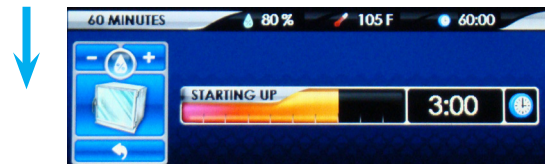




Proofer Recipe Ready to Start 1/3rd Timers:
(with Progress Bar)

- Load and Touch  button to start First Section.





Proofer Count Down Timer
(with add 5 minute button )

- Touch  button to start additional timers.
- Alarm beeps and LOAD NEXT TRAY is displayed in the Main Tool Bar 1/3rd of the time thru the proofer cycle.
- To cancel, touch and hold the countdown timer  for 2 to 3 seconds.

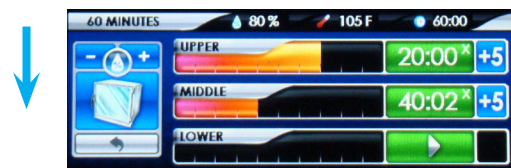

Proof Complete Alarm for UPPER 1/3rd.

- Touch the Timer  or the  button to cancel the alarm.

